

Product specification

Name : ONN-LED machine work light

Model : ONN-M3 Sseries

Version : A0

Date : 2015-01-27

一、Products introduce:

1. 1、Delicate structure, simple and beautiful, competitive price;

深圳市欧恩半导体照明有限公司

电话: 400-0448-288


邮箱: onn001@onnled.net

传真: +86-755-27871421

地址: 深圳宝安区福永新和豪丰科技园二区三楼

- 2、 The radiating of light is good, to insure the life spans of products;
2. 3、 Imported light from Taiwan, china famous power;
- 4、 Fixed by screw base, universal with traditional light, easy install;
3. 5、 The flex of hose is good, can adjustable any angle of illumination.

二、 Products photo and size photo:

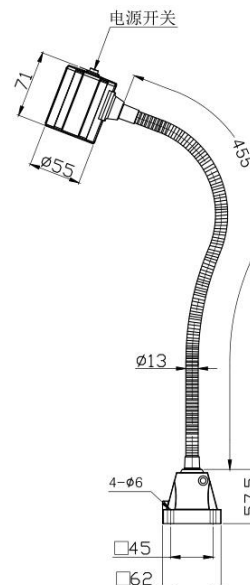

三、 Parameters

Model No.	Input Voltage	Range of input voltage	Range of CCT
<input type="checkbox"/> ONN-M3S-C1	AC220V (50/60Hz)	AC100-240V (50/60Hz)	6000-6500K
<input type="checkbox"/> ONN-M3S-C2	AC220V (50/60Hz)	AC100-240V (50/60Hz)	4000-4500K
<input type="checkbox"/> ONN-M3S-C3	AC220V (50/60Hz)	AC100-240V (50/60Hz)	2800-3200K
<input type="checkbox"/> ONN-M3S-B1	AC/DC 24V	AC/DC 24±2V	6000-6500K
<input type="checkbox"/> ONN-M3S-B2	AC/DC 24V	AC/DC 24±2V	4000-4500K
<input type="checkbox"/> ONN-M3S-B3	AC/DC 24V	AC/DC 24±2V	2800-3200K
Length of power line:	■ 0.7M(Standard)		
Installation:	Fixed base		
Power:	5W		
Input Current (Max) :	(220V) 50mA		(24V) 420mA
Luminous Flux:	400-420 Lm		
IP rating:	IP30		
Luminous efficiency:	70-75Lm/W	CRI:	Ra>82


Drive:	Non-isolation	PF:	$\cong 0.5$
Working temperature:	< 60°C	Beam angle:	45°
Life spans:	50 000H		


四、Environmental Requirements:

Working temperature:	-20~45°C
Save temperature:	10~60°C
Working humidity:	10~90%
Save humidity:	10~90%


五、Picture of light distribution curve:

配光曲线

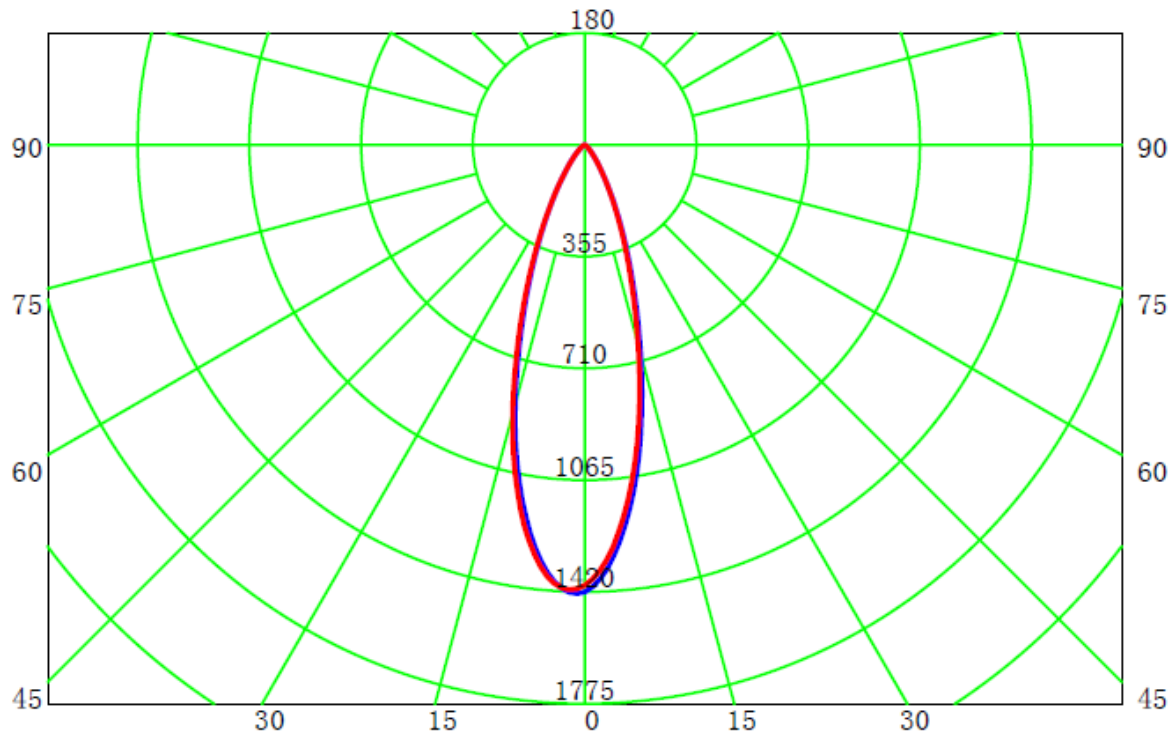


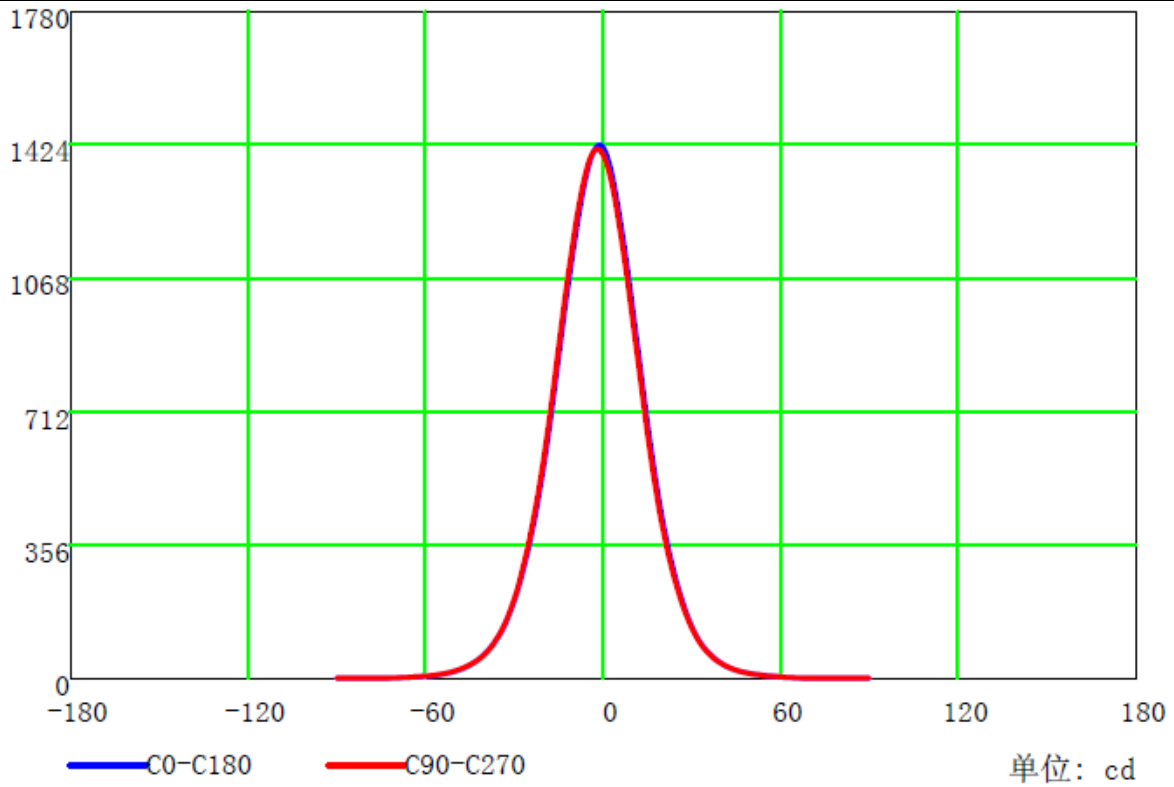


六、The table of average illumination:

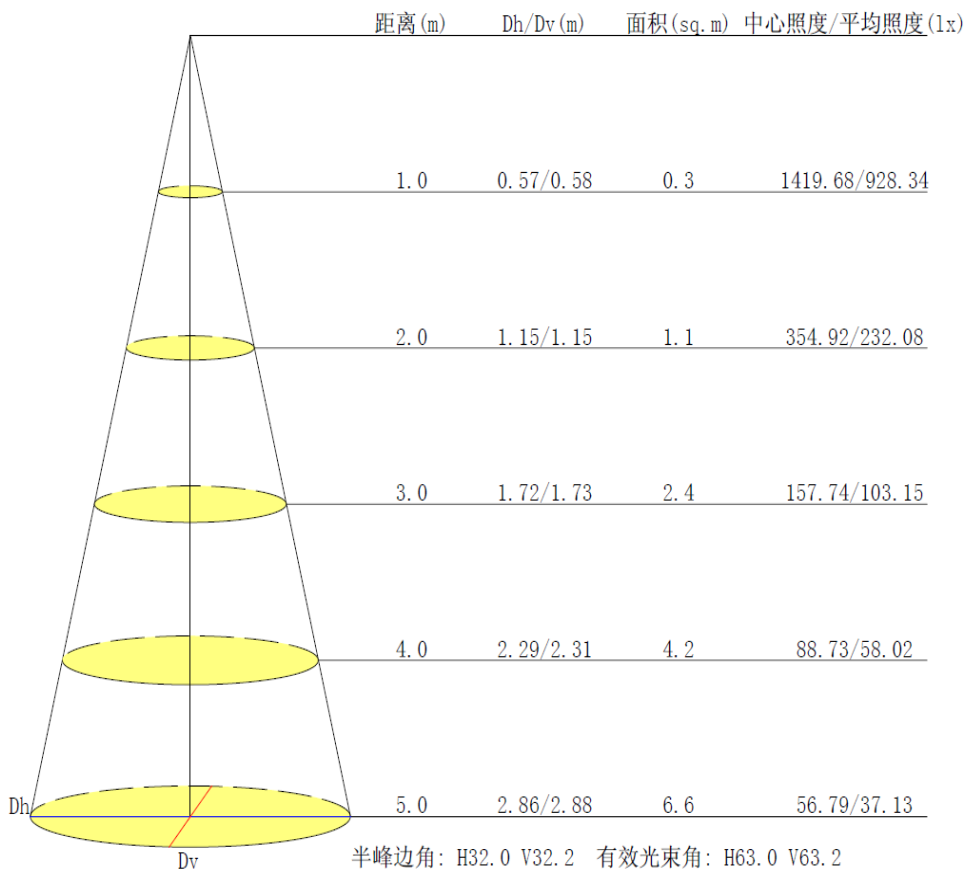

七、Packing:


Packing material	cartons
Size of products (MM)	585
N/W of one light (Kg)	0.58
G/W of total cartons(Kg)	16
Qty in carton(PCS)	20
Size of inner box (L*W*H) mm	610*85*85
Size of outer carton (L*W*H) mm	620*380*460

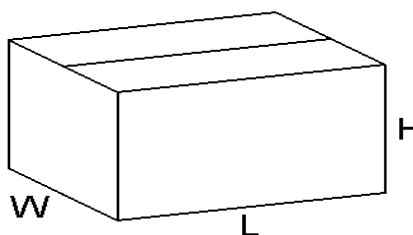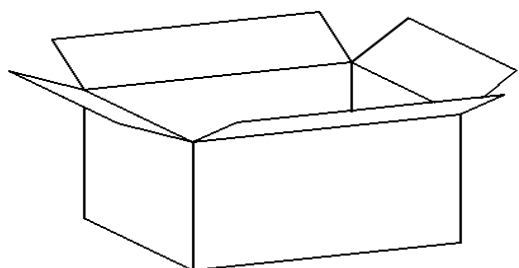

八、Installation:

Fixed by base:

- 1) Make a hole in specify place, diameter of hole is 6mm.
- 2) Fixed by screw, and after finished install, adjustable the angle as you need. (like photo in right).

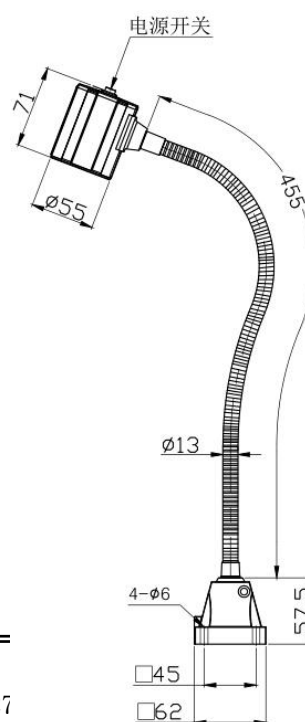

九、Repair list:

- 1、The warranty of the products is 18 months. If broken in natural within the warranty, please bring invoice and date in the light to repair free.
- 2、The following cases are not covered by the warranty, service charges paid by:
 - (1) Altered fixture dates
 - (2) The broken is because of improper use by user;
 - (3) The body of light and bundled products is broken or lost can't warranty;
 - (4) The broken reason is not natural, such broken by wrong input voltage and set up to lead to light can't work;
 - (5) Dismantle and repair have not agree with factory, repair and alter by the other repair person not in authorized service station;
 - (6) The broken is caused by fires, earthquakes, floods, lightning or other natural disasters, pollution and abnormal voltage.
 - (7) Lights need to repair because rodents, salt spray, corrosion.
- 3、Exceed warranty period, repair will be charge fees as standard. Service charge = repair fees + material fees + freight fees.