

Specifications

Product Name: <u>LED Warning Light</u>

Model : ONN-M4V

Date : <u>2017-3-29</u>

Version : <u>A 0</u>




Introduction:


- 1. Exquisite appearance with design patents, multiple functions, high cost performance.
- 2. Adopt high brightness LED chip, wider angle, low thermal resistance, Color area concentrated, low brightness decay with a long life span.
- The whole structure design features good heat dissipation, high quality driver guarantees a long life time entirely.
- 4. A reasonable layout of internal electronic components, strictly ensure a high efficient work state.

Standard picture/size/wiring diagram:






DC24V 不分正负极 (PNP/NPN)



DC24V/AC220V触点式(Contact type)

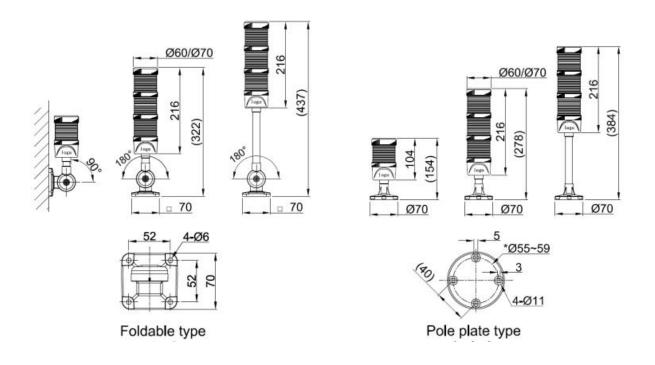

Product Principle:

ONNM4- 3	A A B C - RYG - 60				
1 2	3 4 5 6 7 8				
1 Brand	ONNM4				
2 Layer	 1.One layer single color/multicolor 2. two layers two colors 3. Three layers three colors 4. Four layers four colors 				
3 Mounting	A. Foldable type B. Pole plate C. Short pole plate				
4 Voltage	A. DC12V B. DC24 C. AC220V D.AC110V(contact type)				
5 Function	B. Steady F. Steady with buzzer S. Red flash C. Red flash with buzzer D. All flash E. All flash with buzzer				
6 Wiring	C. Contact type T. Input directly (PNP / NPN)				
7 Colors	Color sequence from top to bottom: Red Yellow Green White Blue				
8 Cover Dia.	60. Ф60mm				





Data sheet:

Model		ONN - M4V Led Warning light				
Voltage	DC24V AC220V	Input current	60mA~200mA	Power	1.4W~5W	
Ingress Protection	IP66 Waterproof	Wire output	□0.5m □	Body color	□Black □Gray	
light source	SMD2835	Lifespan	50,000hrs	Surface Temperatur e	<50℃	
Buzzer	90dB	Flash frequency	60-70/min	Material	Lamp cover: PC Lamp housing: ABS Pole: AL Alloy	
Emitting angle	360°	Color	R/Y/G	Logo	□Customer □Neutral □Onn	
Layer	□Multicolor with multi layers □Single layer with multicolor(Three kinds max.)					

Package

Package	Three layers (Foldable base)	Three layers (Pole Plate)	Four layers(Pole Plate)
Net weight (Kg)	0.325	0.3	0.315
Carton Gross weight(Kg)	6.1	5.8	6
Qty in one carton(PCS)	12	12	12
Inner package size (L*W*H) mm	415*80*80mm	415*80*80mm	510*90*75mm
Outer package size (L*W*H) mm	440*265*345mm	440*265*345mm	580*280*233mm







Repair Rule:

- 1. The warranty of the products is 24 months. If broken in natural within the warranty, please bring invoice and date in the light to repair free.
- 2. The following cases are not covered by the warranty, service charges paid by:
 - (1) Altered fixture dates
 - (2) The broken is because of improper use by user;
 - (3) The body of light and bundled products is broken or lost can't warranty;
- (4) The broken reason is not natural, such broken by wrong input voltage and set up to lead to light can't work;
- (5) Dismantle and repair have not agree with factory, repair and alter by the other repair person not in authorized service station;
- (6) The broken is caused by fires, earthquakes, floods, lightning or other natural disasters, pollution and abnormal voltage.
 - (7) Lights need to repair because rodents, salt spray, corrosion.
- 3. Exceed warranty period, repair will be charge fees as standard. Service charge = repair fees + material fees + freight fees.