
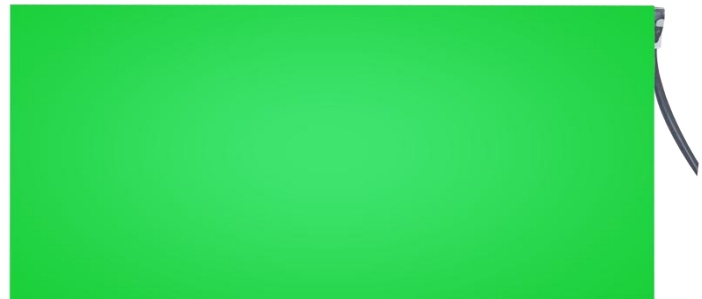


MP04 LED Signal TowerLight

Introduction:

- 1.The combination of aluminum alloy on the top and the solid acrylic plate ensures durability and even light distribution.
- 2.The LED gold wire light beads provide high brightness and long lifespan, resulting in low maintenance costs.
- 3.The lighting color can be customized to single-layer red, green, yellow, blue, white, or various other colors you want. Multiple sizes of light panels are also available for selection.
4. It can be fixed with glue or screwed in place for convenient installation.

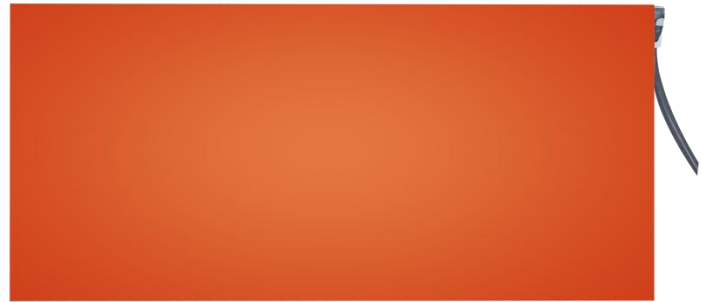

Warranty: 2 years

Certification: TUV CE, RoHS, FCC

Application: CNC machine, Automatic equipment, SMT equipment etc.

Parameter:

Model No.	MP04
Input voltage	DC24V
Input current	50 mA
Working Temperature	-20~45°C
IP rating	IP40
Color	R Y G B W
Material	aluminum alloy + acrylic body
Lifetime	40,000 hours
Installation	Fixed by glue


Shenzhen Onn Semi-conductor lighting Co.,Ltd

Tel: +86-755-29566540 Fax: +86-755-27871421 Web: www.onlion88.com

Add: Haofeng Industrial Park NO.2 Zone, Xinhe, Bao'an District, Shenzhen, China.


I. Width < 200mm

Dimension(mm):

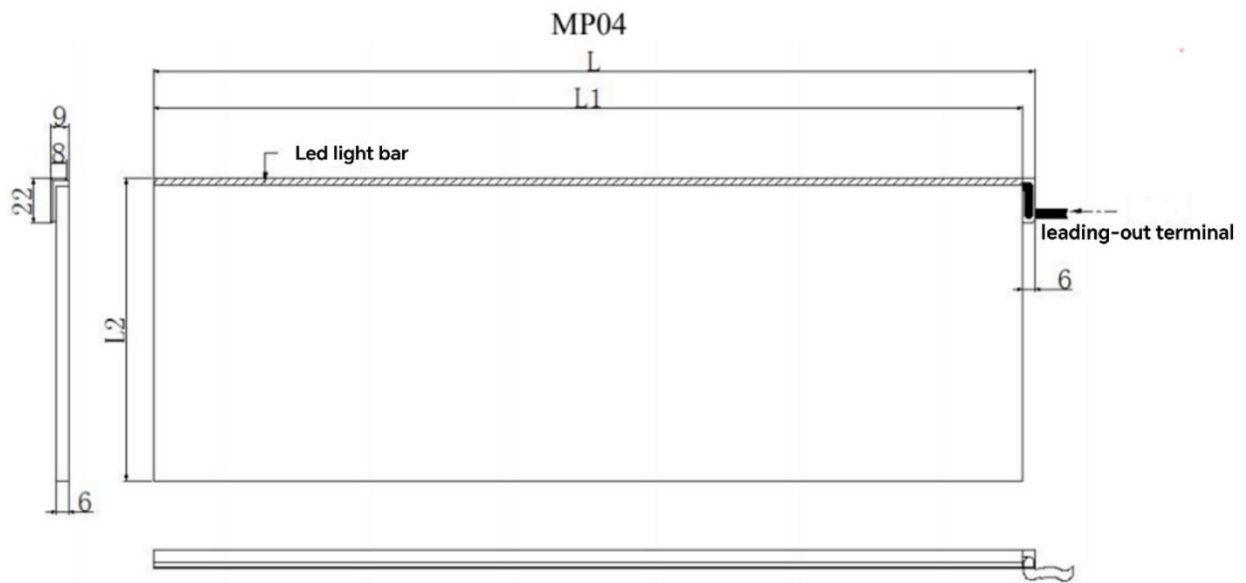

L(mm)	222	330	438	546	654	762	870	978
L1(mm)	216	324	432	540	648	756	864	972
L2(mm)	(100)(150)							
Luminous surface	(L1-15)*(L2-25)							

II. Width \geq 200mm

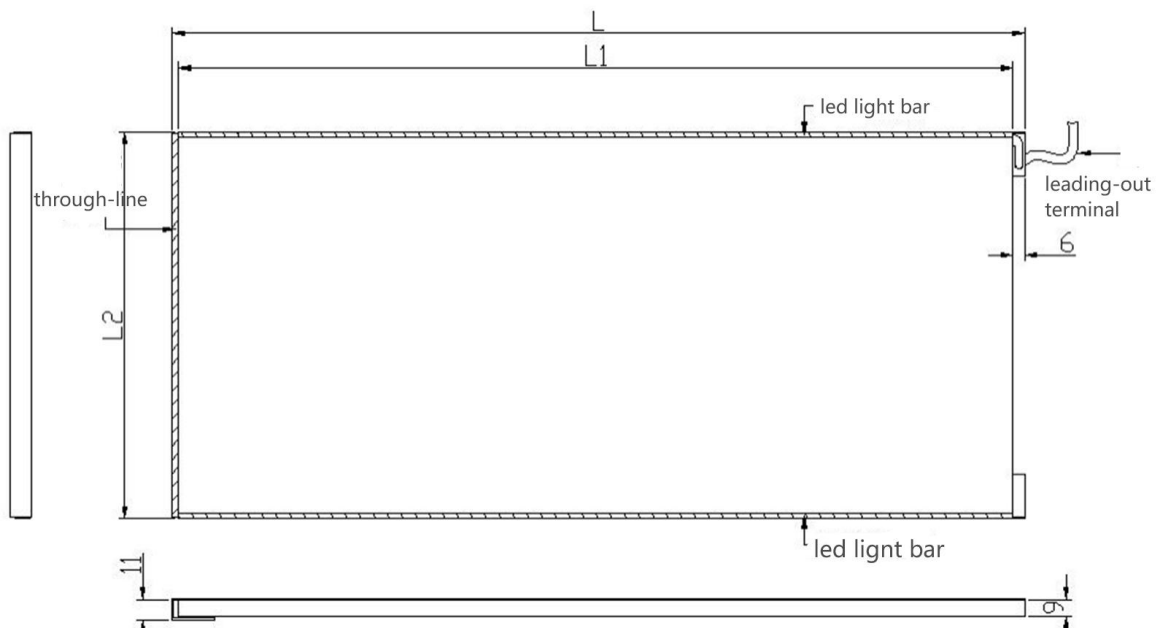

L(mm)	226	334	442	550	658	766	874	982
L1(mm)	216	324	432	540	648	756	864	972
L2(mm)	(200)(250) (300)							
Luminous surface	(L1-15)*(L2-25)							

Package info.:

Model No.	MP04	
Packing material	Cartons + PC bags	
Product size(mm)	222	330
Unit weight(Kg)	0.315	0.395
G.W.(Kg)	7.21	8.97
Qty of packge(PCS)	22	22
Carton size(L*W*H)	370mm*200mm*220mm	

