

ONN-M4E LED Warning Light

Introduction:

1. Single-layer with tri-colors(R, Y, G),novel shape, both practical and ornamental.
2. Use acrylic lamp body and Aluminum. base,uniform color, durable and yellowing-proof.
3. Base and lamp column sizes are optional to suit different needs.
4. Logo can be engraved inside, OEM available.

Application: CNC machine, Automatic equipment ,SMT equipment etc

Warranty: 2 years

Certification: CE, RoHS, FCC



Ordering Code:

ONN M4E- D - B T F- RYG- ()						
①	②	③	④	⑤	⑥	Base type
①Model No. :	ONN M4E					
②Glass Thickness:	D、 10mm S、 19.5mm					
③Voltage:	A、 DC12V B、 DC24V C、 AC220V					
④Connect type:	C、 Contact type; T、 PNP & NPN					
⑤Function:	B、 Steady F、 Steady with Buzzer S、 Red Flash C、 Red Flash with Buzzer D、 All Flash E、 All Flash with Buzzer					
⑥Color:	R:Red Y:Yellow G:Green B: Blue					
⑦Base type:	(Mental base) / (Injection moulding base)					

Parameters:


Model No.: M4E					
Input Voltage	DC24V	Input Current	40~150mA	Consumed Power	Single color 0.9 W All color with buzzer 4.6W
IP rating	IP40	Cable Length	about 0.6M	Base color	Silver
Layer	One layer			Materials	Nylon fiber, anodized aluminum alloy, etc
Brand		ONN			
Light Source		SMD 2835 LED 0.2W/pcs			
LED Lifespan		50,000 hours			
Beam Angle		Single SMD 120°, whole light 360°			
Place of Origin		Shenzhen, China			

Environmental Demands:


Work Temperature:	-20~45℃
Storage Temperature:	-40~70℃
Work Humidity:	10~90%
Storage Humidity:	10~90%

Dimension(mm):

M4E (Mental base)

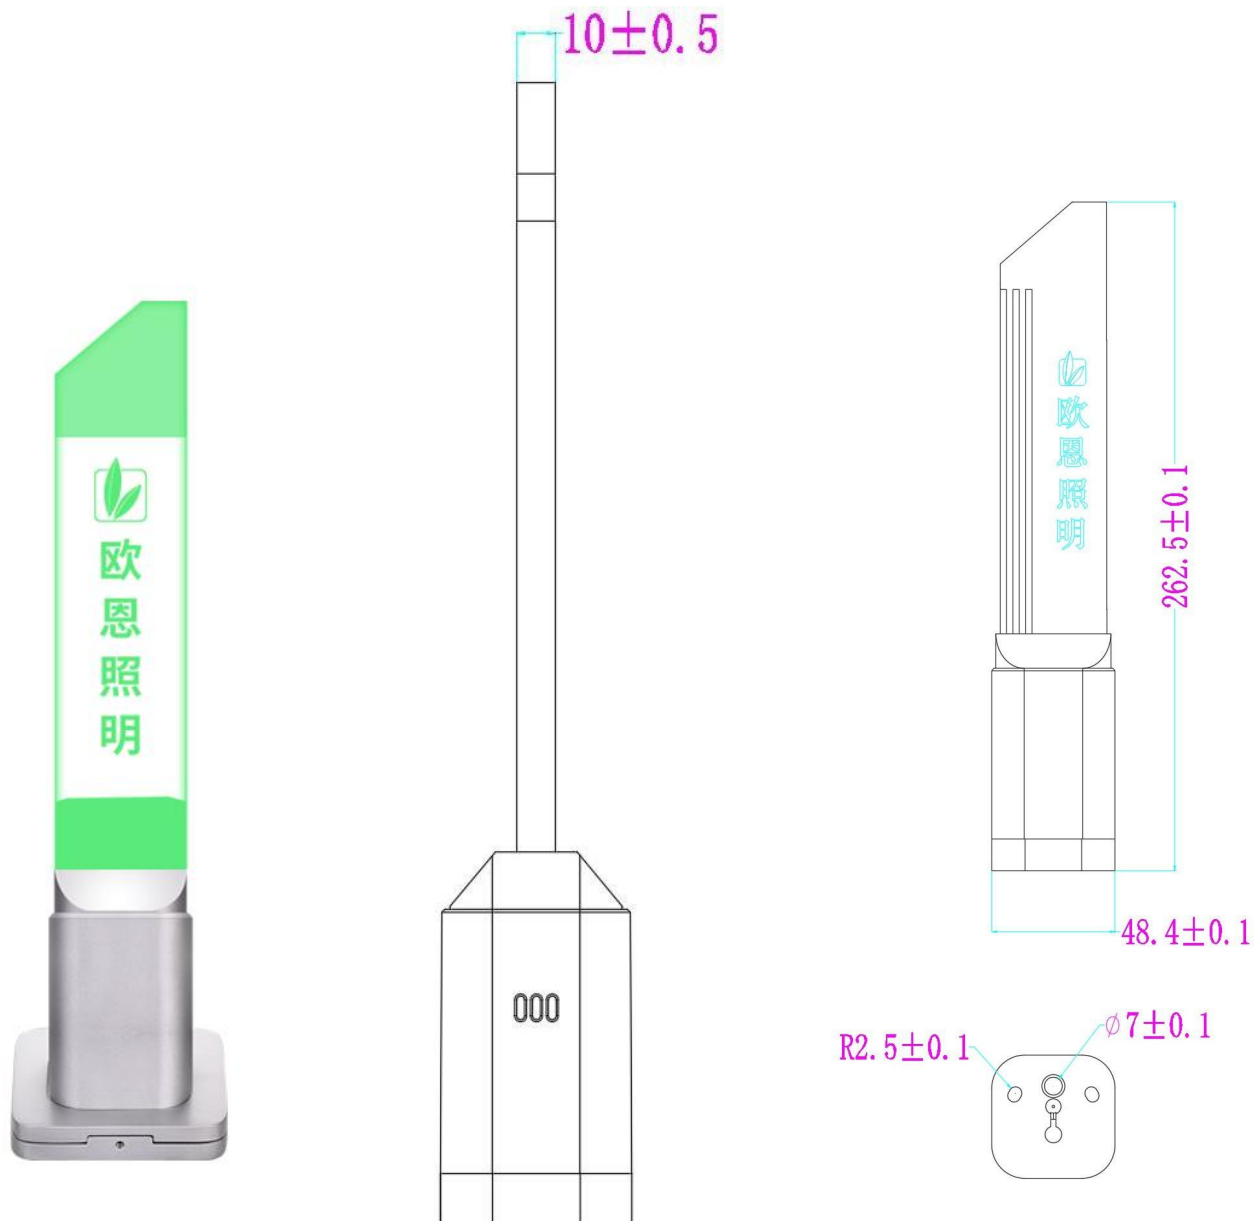


M4E (Injection moulding base)

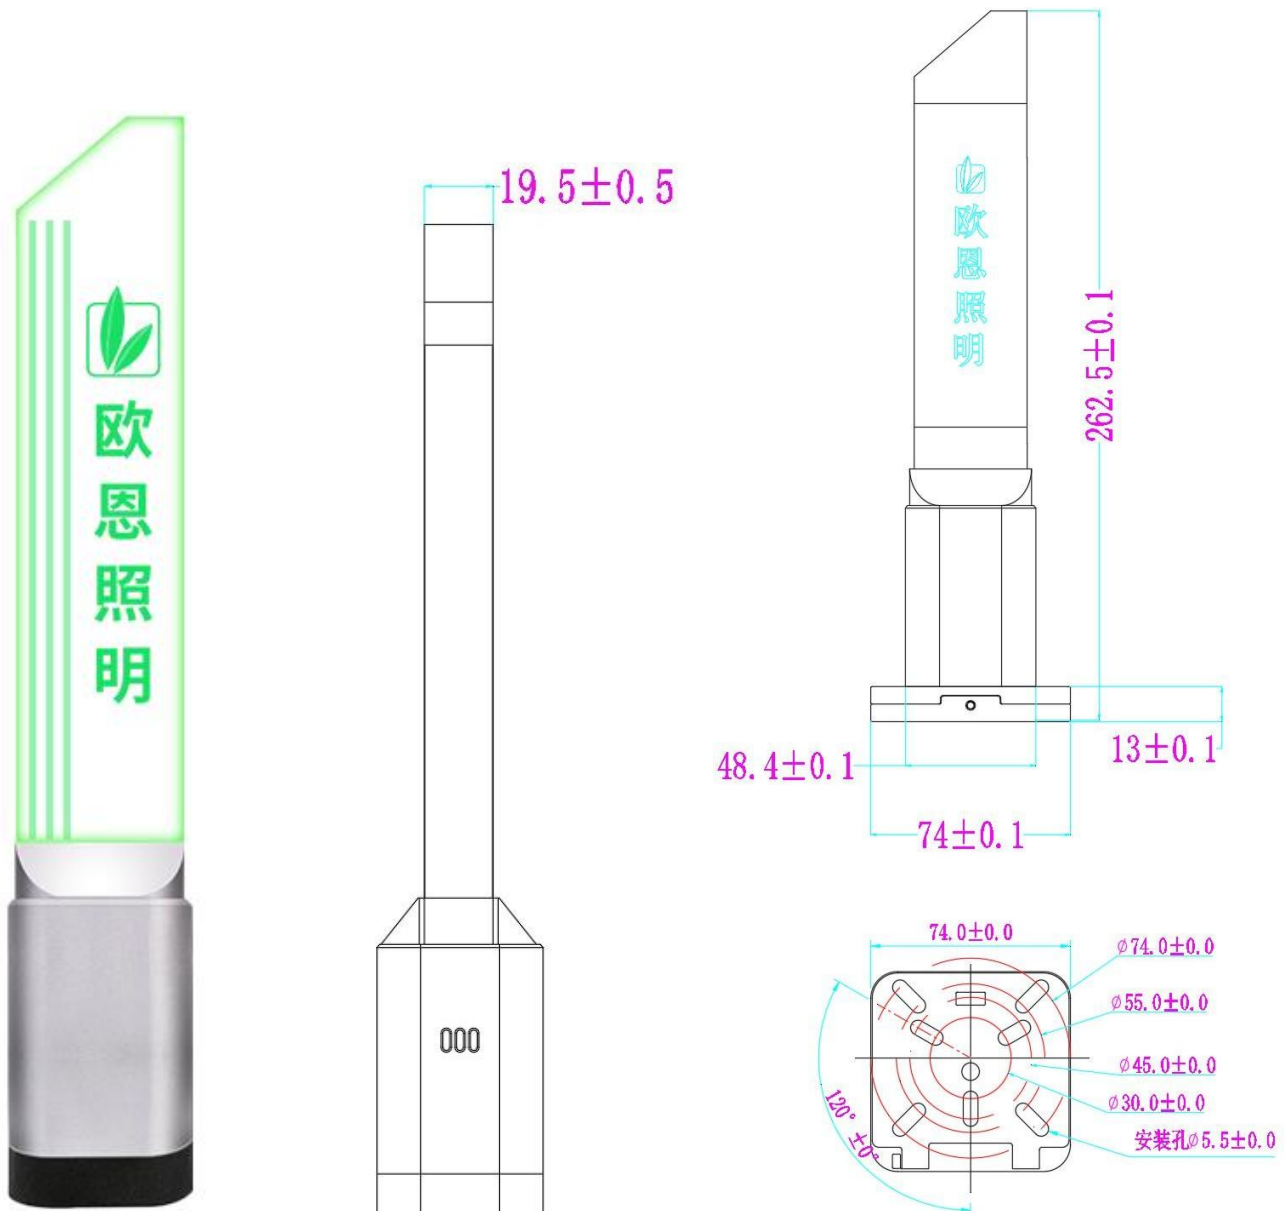


Wiring instruction:

PNP & NPN

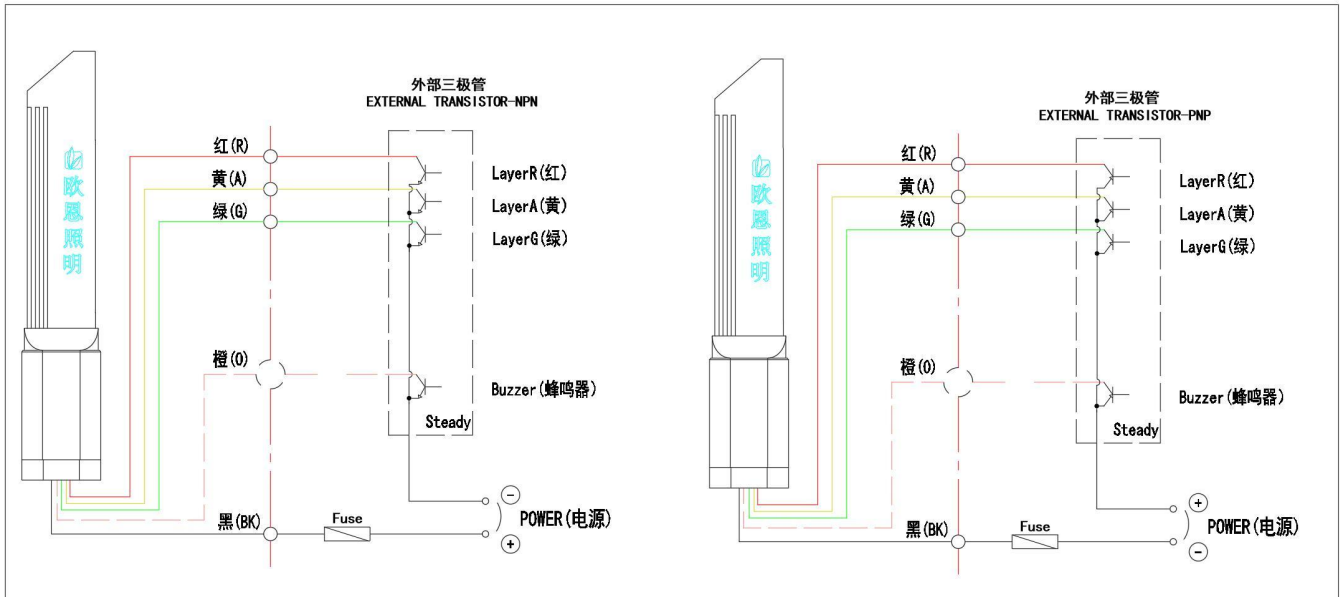

⑥接线方式 (Connect type): T、不分正负极 (PNP&NPN)

Contact type

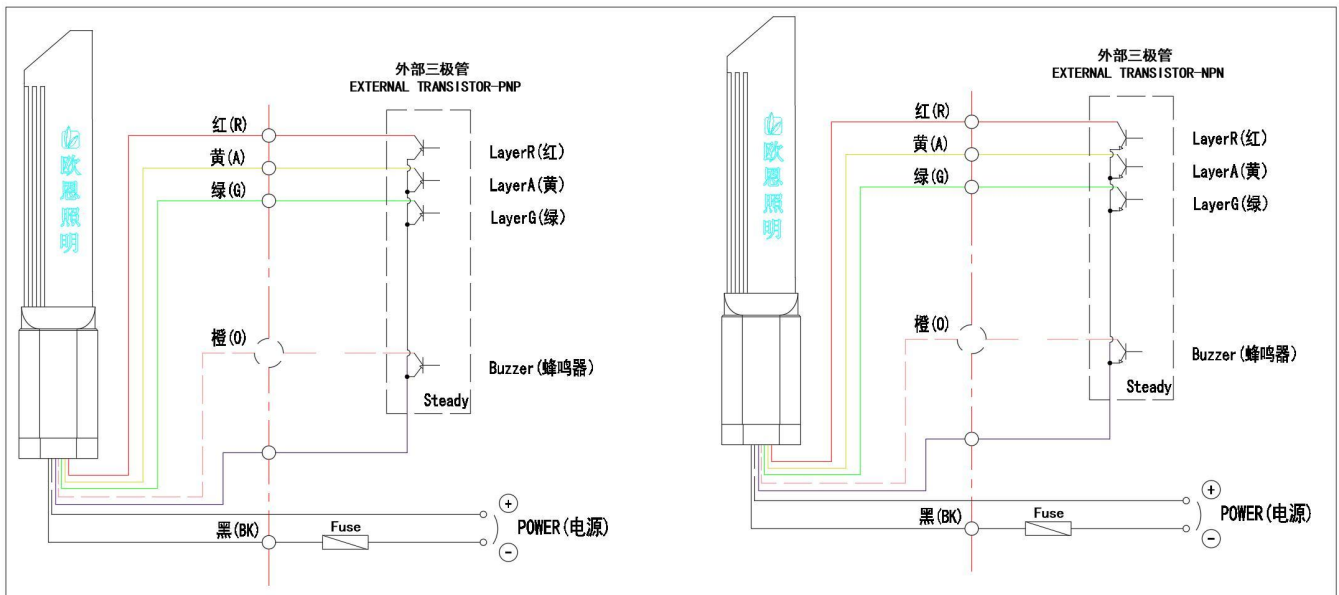

⑥接线方式 (Connect type): C、触点式 (Contact type)

Package info.:

Packing Materials	Carton
Unit N.W. (Kg/pcs)	0.77
G.W.(Kg/carton)	11.4
QTY/Carton	12
Inner Box Size (L*W*H) mm	300*90*90mm
Carton Size (L*W*H) mm	380x320x29mm

