



Product Specification

Name : ONN-LED Freezer Light

Model : ONN-X1A Series

Date : 2015-03-19

Version : A 0

Product Features:


1. Input DC 12V , More safe
2. Aluminum housing , good heat dissipation , long lifespan
3. End cap is universal for left and right , easy to install, can be cut, material management is very convenience .
4. Instantaneous light, no flicker, no sound, environmental protection, non-polluting and harmful substances.

Application:

Ice machine, island cabinet, vertical freezer, bedroom cabinet, cake cabinet, refrigerator interior lighting, display cabinets, jewelry counters, display stand.

Pictures:

Model: ONN-X1A

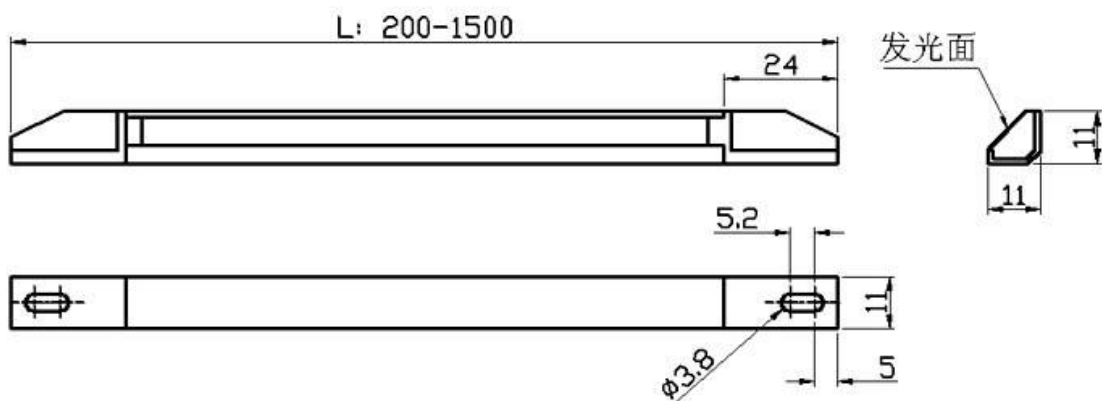



Basic Data:

| Model | Nominal Voltage | Input Voltage Rang | CCT |
|----------------------|---|---------------------------|---------------------------|
| ONN-X1A-A1 | AC/DC 12V | AC/DC 12V | 5500-6000K |
| ONN-X1A-A2 | AC/DC 12V | AC/DC 12V | 4000-4500K |
| ONN-X1A-B1 | AC/DC 24V | AC/DC 24V | 5500-6000K |
| ONN-X1A-B2 | AC/DC 24V | AC/DC 24V | 4000-4500K |
| ONN-X1A-B | AC/DC 24V | AC/DC 24V | Pink color |
| Wire Length: | ■ around 0.15M (standard), not plug fitted. | | |
| Installation: | fix by metal clip | | |
| Lamp length: | 900mm | 1200mm | 1500mm |
| Power Cost: | 9.5W | 12W | 14W |
| Input Current: | (12V)790mA (24V)395mA | (12V)1000mA (24V)500mA | (12V)1170mA (24V)590mA |
| Luminous Flux: | 608 Lm | 864 Lm | 1100 Lm |
| Protection: | IP53 | | |
| Efficiency: | 80-90Lm/W | | |
| Surface temperature: | < 60°C | Beam Angle: | 120° |
| Life: | 50 000H | LED density | 60pcs/M |

Working Conditions:


| | |
|----------------------|----------|
| Ambient Temperature: | -20~45°C |
| Storage temperature: | -40~70°C |
| Ambient humidity: | 10~90% |
| Storage humidity: | 10~90% |

Light Distribution Curve:

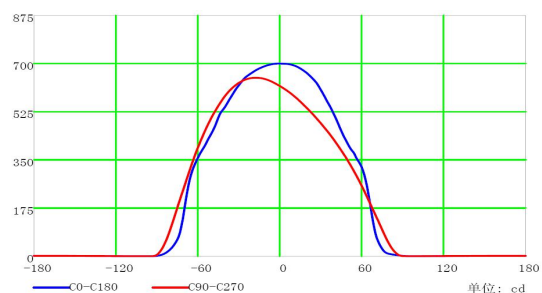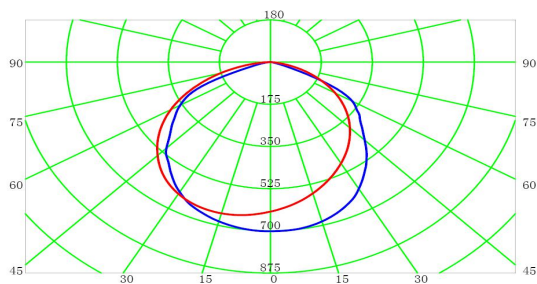

Average illumination:

灯具有效平均照度图

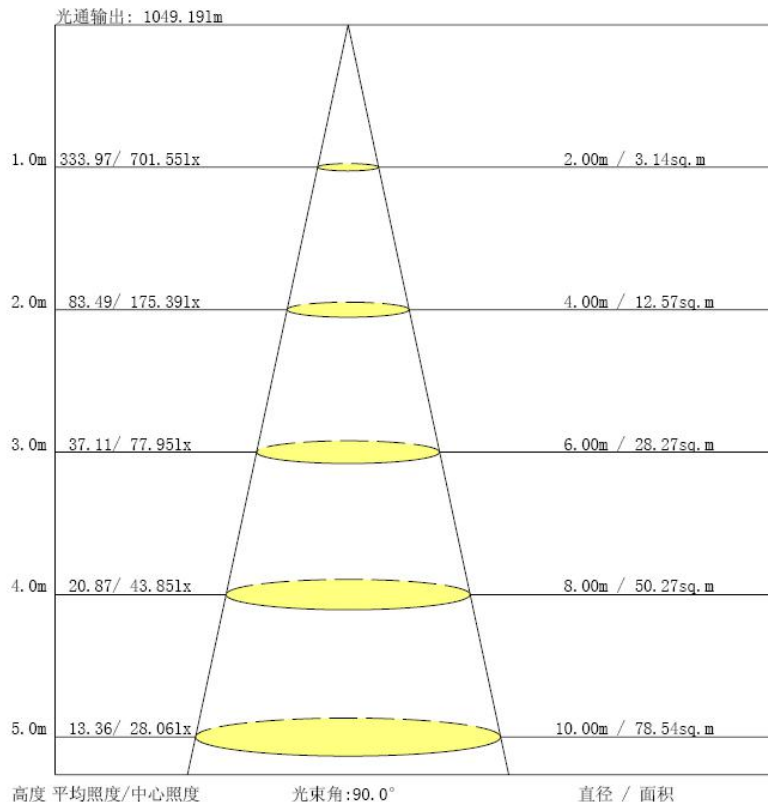

Packing:

| Package Material | Carton | | |
|------------------------|------------------|--------------|--------------|
| | Lamp Length (MM) | 900 | 1200 |
| Lamp Weight (Kg) | 0.11 | 0.14 | 0.19 |
| Weight/CTN(Kg) | 12 | 15 | 20.5 |
| PCS/CTN | 96 | 96 | 96 |
| Carton Size (L*W*H) mm | 960*210*200 | 1260*210*200 | 1560*210*200 |