

LED Warning Light ONN-M4

Introduction:

1. Traditional design, multi-layer and multi-color available.
2. Buzzer optional, volume louder than 85dB.
3. High brightness LED chip, long lifetime and low decay.
4. Three kinds of base are available, easy to install.
5. Pole length can be customized.
6. **Top buzzer, volume up to 110dB.**

Application: CNC machine, Automatic equipment , SMT equipment etc.

Warranty: 2 years

Certification: CE, RoHS, FCC

Ordering code:


ONN - M4	<u>1</u>	<u>A</u>	<u>B</u>	<u>B</u>	<u>T</u>	<u>RYGWB</u>	<u>60</u>
	1	2	3	4	5	6	7
1.Layer	1: Single layer, 2.Two layers, 3.Three layers, 4: Four layers, 5: Five layers						
2. Mounting type	A: Foldable type, C: Pole and plate E: L bracket						
3. Voltage	A: DC12V, B: DC24V, C: AC100-240V(50/60Hz)						
4.Function	B: Steady, F: Steady with buzzer, S: Red flash, C: Red flash with buzzer, D: All flash, E: All flash with buzzer						
5.Connect type	C: contact type, T: PNP& NPN						
6. Color	R: Red, Y: Yellow, G:Green, W:White, B:Blue						
7. Diameter	60: ϕ 60mm, 70: ϕ 70mm						

Parameter:


Power	1.8W for each color
Input voltage	DC12V, DC24V, AC100-240V(50/60Hz)
Current	60-80mA for each color
Working Temperature	-20~45℃
IP rating	IP53
Buzzer volume	>110dB
Material	PC lens and ABS body
Lifetime	50,000 hours
Installation	Fixed by screw or bracket



Dimension(mm):

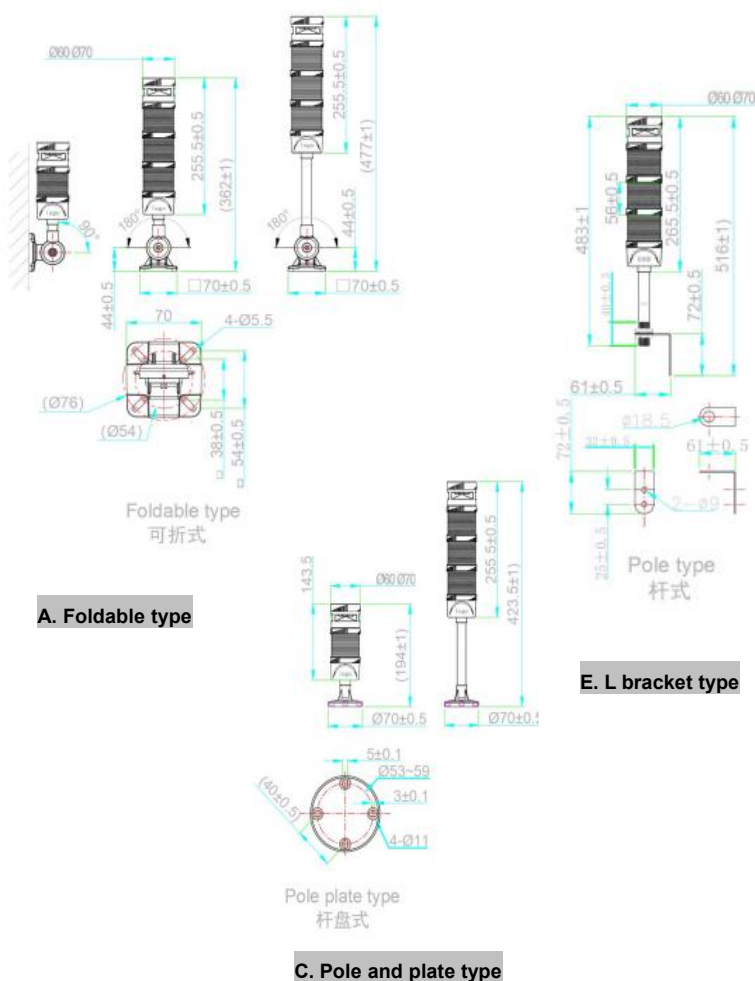

Wiring instruction:

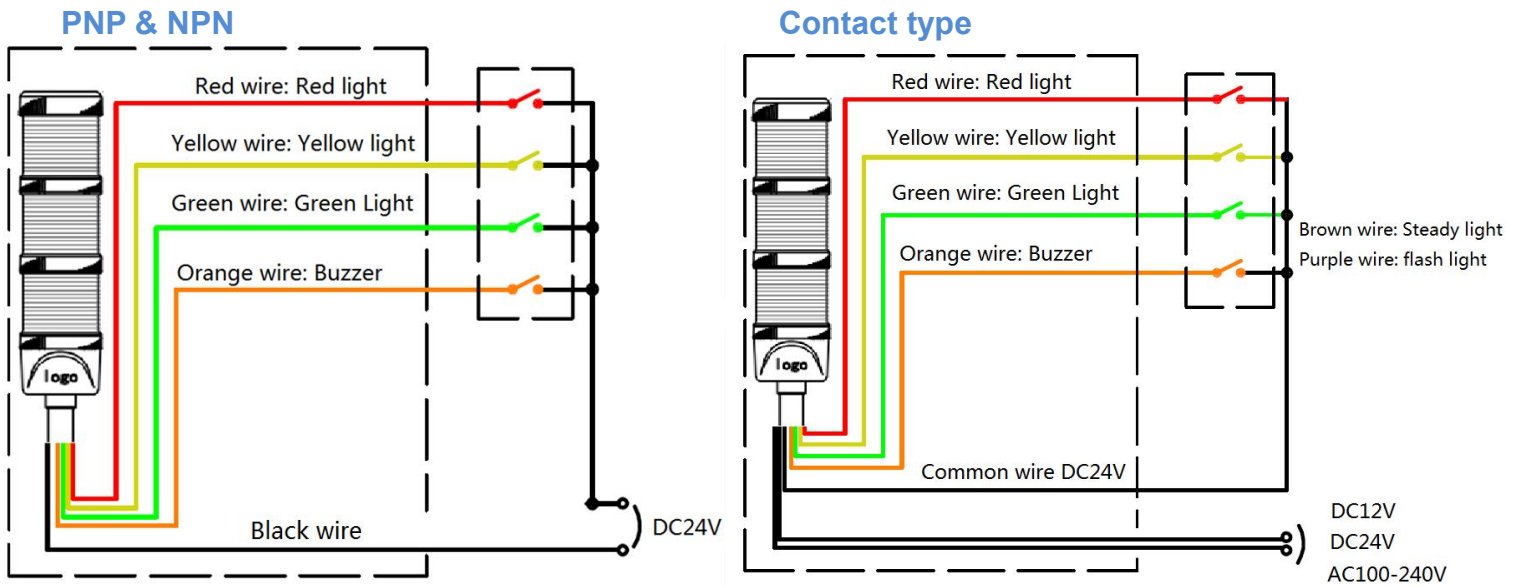

Logo print service

Your logo can be printed on lamp body, and be illuminated by blue back light.



Package info.:

Item No.	Qty/carton	Carton size	Total NW.	Total GW.
M4-3 layers	12 pieces	440*270*350mm	5.4kg	7.6kg
M4-4 layers	12 pieces	580*280*233mm	6kg	7.6kg

